



*Sirius*

#### PRODUCT FEATURES :

- Light weight seat.
- Seat design engineered for comfort.
- Seat assembly meets AIS-016 Test Standards/Certified.
- Non metallic parts conform to FR spec IS 15061(Type 2).
- Rugged retractable armrest with ease of operation.
- Injection molded parts for aesthetic appeal.
- Customer choices on Upholstery

#### OPTIONAL ACCESSORIES (ADDITIONAL COST) :

- 2P seat belt – Static
- Luggage Holder (Canvas)

#### STANDARD ACCESSORIES :

- Grab handle
- Luggage Holder (MS)

#### SEAT FITMENT GUIDELINES :

- Use C-Section for seat mounting (25x75x25x2.5mm)
- Use M10x45(Grade-8.8) for mounting a seat leg with Torque -  $50 \pm 2$  NM

#### WARRANTY POLICY:


The product covers warranty for manufacturing defects, pre mature failures only.  
Product abuse & misuse does not warrant any free replacement

#### PERIODIC MAINTANENCE:

Upholstery- Periodic cleaning for dust recommend with vacuum cleaner.  
Water, liquid cleaners and stain removers should not be used on seats.  
Dry clean upholstery covers separately.

#### ARMREST:

Check the free play for ease of use. Periodically set the recommended tightening torque of  $10 \pm 2$  NM with 10mm flat/ring spanner

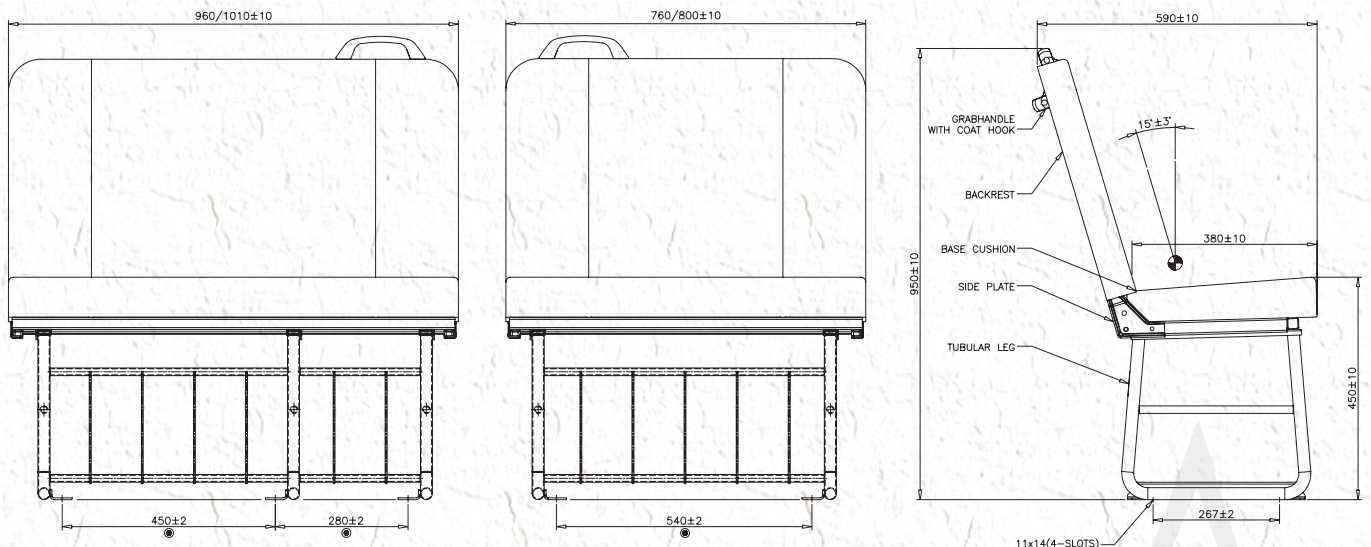

Registered Office & Factory Address

**StellarSP Pvt. Ltd.**

Survey No.449, Anekal - Samandur Road, Samandur  
Anekal Taluk, Bengaluru - 562106, Karnataka, India  
Tel: Factory + 91 80 29909993, Sales: +91 80 22210010  
Mobile: Marketing + 91 91410 45274, Sales +91 91410 45276  
Engineering +91 91410 45280, Purchase +91 91410 45288  
Email: [contact@stellarsp.com](mailto:contact@stellarsp.com), [sales@stellarsp.com](mailto:sales@stellarsp.com)  
[www.stellarsp.com](http://www.stellarsp.com)

#### SEAT DIMENSIONAL SPECIFICATION

| Sl. No | Description | Seat Size         |       |
|--------|-------------|-------------------|-------|
|        |             | MM                | INCH  |
| 1      | 1S          | 400 $\pm$ 10      | 16    |
| 2      | 2S          | 760/800 $\pm$ 10  | 30/32 |
| 3      | 3S          | 960/1010 $\pm$ 10 | 38/40 |